


Cable trolley

TTX12- 2 CXX* (TY Y 29.2 – 36372997-001:2010)

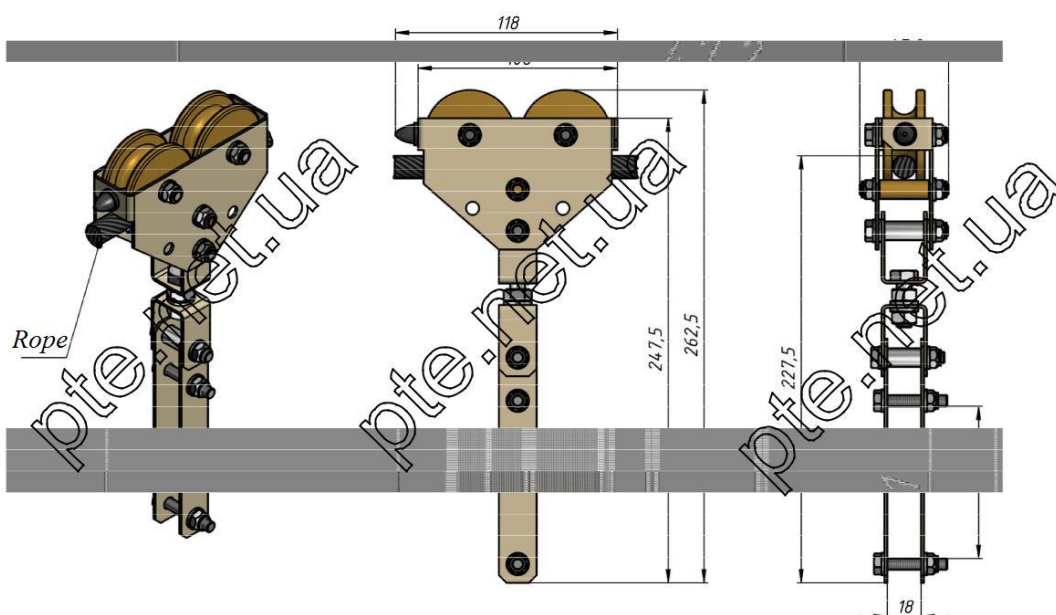

Primary Use:

Cable trolleys moving along the cable are used to flexibly supply power to various production mechanisms, such as hoisting equipment (cranes, manipulators and freight carts), transport systems, moving platforms, etc.

This cart can be made in compliance with the requirements for premises with a category of mixtures of explosive gases and vapors with air - IIB and groups of explosive mixtures with air at the autoignition temperature - T4.

Specifications:

Maximum bearing capacity, kg	12,5
Temperature condition, °C	-40...+60
Maximum permissible travel speed, m/s	2,5
Accommodation category	U2
The diameter of the cable (along which trolley moves), mm	6...12

<u>Vendor code</u>	<u>Material</u>	<u>Material of rollers</u>
31021014	Steel (powder coating)	Steel
31022014	Steel (powder coating)	Galvanized steel
31023014	Steel (powder coating)	Caprolon
31024014	Steel (powder coating)	Polyamide
31025014	Steel (powder coating)	Bronze
31022024	Galvanized steel	Galvanized steel
31023024	Galvanized steel	Caprolon
31024024	Galvanized steel	Polyamide
31025024	Galvanized steel	Bronze
31023034	Stainless steel	Caprolon
31024034	Stainless steel	Polyamide
31025034	Stainless steel	Bronze
31027034	Stainless steel	Stainless steel
31025044	Brass	Bronze

TO ORDER THE CABLE TROLLEY YOU SHOULD INDICATE THE VENDOR CODE

* Note: X - indices, which are assigned to manufacturers for different versions, according to the specifications.



Enterprise of Current Collector and Electric Drive systems

61124 Ukraine, Kharkiv

Phone: +38(057) 755-02-41, +38(057) 764-32-18, +38(057) 756-39-18

Mob phone: +38(066) 321-53-02; +38(093) 939-59-49; +38(095) 880-91-80

email: pte.kharkov@gmail.com; manager@pte.net.ua

Web-site: www.pte.net.ua